

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: Multi Zone Regular Heat Series
Model Number: MO6EX-H60B-2A

Multi Zone Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTQ420D1UMU	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	1400	
Refrigerant Oil	V74	
Outdoor Air Flow (Max) (CFM)	4503	
Outdoor Noise Level (dBA)	65	
Dimension (W×D×H)	inch	37-1/2 x 16-5/16 x 52-1/2
	mm	952 × 415 × 1333
Package (W×D×H)	inch	43-1/8 x 19-1/2 x 58-1/4
	mm	1095 × 495 × 1480
Net/Gross Weight	lbs	238 / 270
	kg	107.9 / 122.6

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	36.0
Connection Wiring	AWG 14/4
System MOCP	40.0
Compressor RLA	25
Outdoor Fan Motor RLA	2.5
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	6,000 (1,200~6,000)
System Power Input @ Heating (W)	4,753 (1,200~5,200)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

EFFICIENCY

Cooling		Heating	
SEER2	22.0	HSPF2-4	9.5
EER2	10	COP	3.7

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	60,000
Min/Max Capacity	19,000~62,000
Moisture Removal(L/h)	5
Standard Operating Range(°F/°C)	-13~122 (-25~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	60,000
1. @ 47°F Min/Max Capacity	20,000~60,000

PIPING


Liquid Size	6 x 1/4" (6 x 6.35 mm)
Gas Size	4 x 3/8" +2 x 1/2" (4 x 9.52 mm+2 x 12.7 mm)
Max. Piping Length for all rooms(ft/m)	262 (80)
Max. Piping Length for one IDU(ft/m)	115 (35)
Max. Height Difference of IDU and ODU(ft/m)	49 (15)
Refrigerant Pre-charged Amount(oz/kg)	152 (4.3)
Refrigerant Precharge Length(ft/m)	25 (7.5) x 6
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16 (15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32 (30)

2. @ 17°F Rated(H32)	39,000
3. @ 5°F Rated: Capacity / COP(H42)	39,000 / 2.2
3. @ 5°F Max: Capacity	39,000
Standard Operating Range(°F/°C)	-13~75 (-25~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

Connection Method	Flared
-------------------	--------

Outdoor Unit Dimension

Unit: inch (mm)

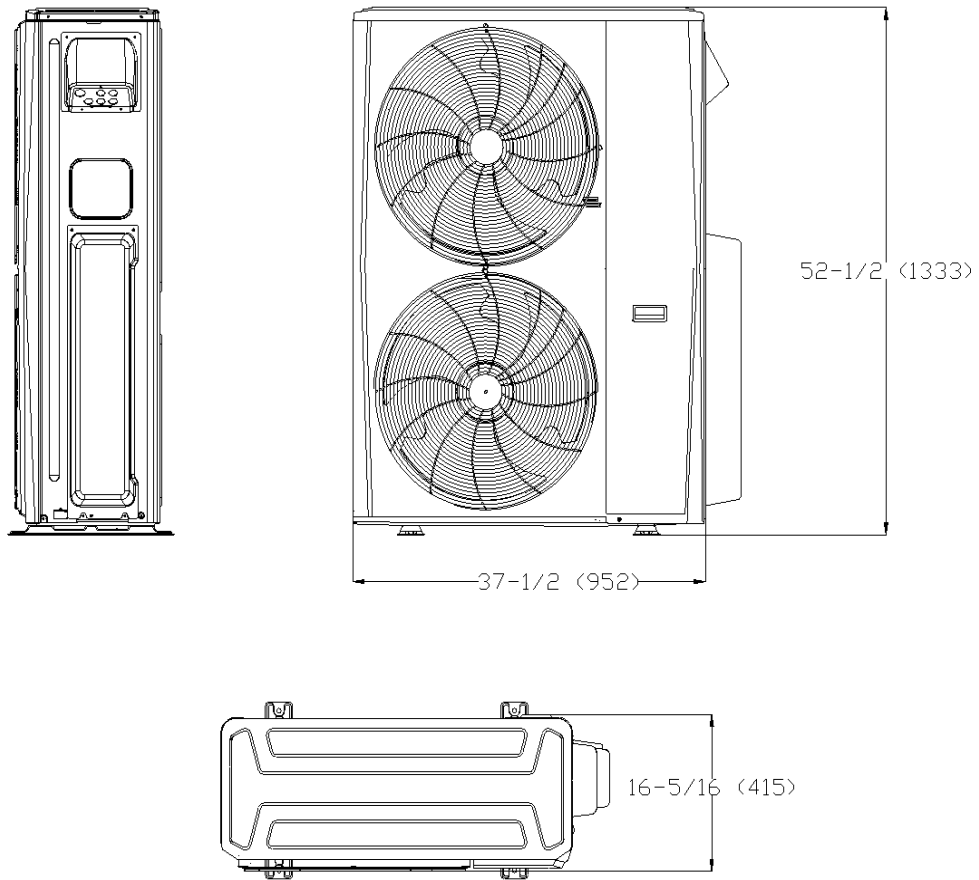

Installation Instruction

